




QUIETR® SPIRAL DUCT LINER

CUSTOM, TAILORED DESIGN

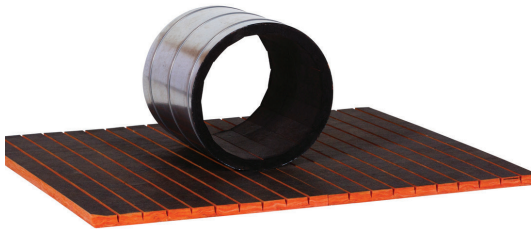

Owens Corning® QuietR® Spiral Duct Liner is tailored to fit your specific duct size, compression at grooves and joints is kept to a minimum, providing consistent thermal performance throughout the entire duct system.

This product is supplied by fabricators across North America. Please consult Owens Corning® for a list of fabricators who can supply QuietR® Spiral Duct Liner.

QUIETR® SPIRAL DUCT LINER

- Outstanding thermal and acoustical performance
- Economical, cost effective alternative to round double-wall configuration air ducts
- Cleanable surface with a black mat facing that provides a smooth, durable surface making it easier to clean the duct liners using methods and equipment described in North American Insulation Manufacturers Association (NAIMA) Publication AH122, Cleaning Fibrous Glass Insulated Duct Systems: Recommended Practice
- Bacterial and fungal growth resistant with an EPA registered biocide that protects the airstream surface from microbial growth

Physical Properties

PROPERTY	TEST METHOD	VALUE
Maximum temperature limits	UL 181/ULC S110	Internal: 250°F (121°C) External: 150°F (66°C)
Maximum air velocity	UL 181 Erosion test	5,000 fpm (25.4 m/sec)
Water vapor sorption	ASTM C 1104	<3% by weight at 120°F (49°C), 95% R.H.
Mold growth	UL 181	Meets requirements
Mold growth	ASTM C1338	Meets requirements
Fungi resistance	ASTM G21	Meets requirements
Bacteria resistance	ASTM G22	Meets requirements
Surface burning characteristics Flame spread Smoke developed	UL 723 ¹	<25 ¹ <50

1. The surface burning characteristics of this product have been determined in accordance with UL 723. This standard should be used to measure and describe the properties of materials, products or assemblies in response to heat and flame under controlled laboratory conditions and should not be used to describe or appraise the fire hazard or fire risk of materials, products or assemblies under actual fire conditions. However, results of this test may be used as elements of a fire risk assessment which takes into account all of the factors which are pertinent to an assessment of the fire hazard of a particular end use. Values are reported to the nearest 5 rating. ASTM E84, UL 723, and NFPA 255 are considered by most officials to be synonymous surface burning test methods.

Product Applications

Limitations

QuietR® Spiral Duct Liner is not recommended for the following applications:

- Ducts which will be subjected to operating temperatures exceeding 250°F (inside surface)
- Ducts which will be subjected to temperatures exceeding 150°F on the outside surface
- Kitchen or fume exhaust ducts or to convey solids or corrosive gases
- Burying in concrete or buried below grade
- Installation immediately adjacent to high-temperature electric heating coils without radiation protection and to equipment such as evaporative coolers, humidifiers, cooling coils and outside intakes
- With coal or wood-fueled equipment, or with equipment of any type which does not include automatic maximum temperature controls
- Ducts which will be subject to liquid water, liner should be protected with a sheet metal sleeve and drip pan adjacent
- Inside fire damper sleeves
- When duct systems run through unconditioned space and are used for cooling only (when heating is from another source), register openings must be tightly sealed to prevent accumulation of water vapor in the duct system during the heating season

Availability

THICKNESS

48" x 120" x 1" thickness (1,220mm x 3,048mm x 25mm)

48" x 120" x 1½" thickness (1,220mm x 3,048mm x 38mm)

48" x 120" x 2" thickness (1,220mm x 3,048mm x 51mm)

Thermal Performance

AT 75°F (24°C) MEAN TEMPERATURE	1" (25MM)	1½" (38MM)	2" (51MM)
R-value: ft ² ·°F/BTU (RSI: m ² ·°C/W)	4.30 (0.76)	6.50 (1.15)	8.70 (1.53)
k-value: BTU·in/hr·ft ² ·°F (I W/m ² ·°C)	0.23 (0.033)	0.23 (0.033)	0.23 (0.033)

Acoustical Performance

Sound absorption coefficients at octave band center frequencies, Hz.

THICKNESS	125	250	500	1000	2000	4000	NRC
1"	0.10	0.24	0.74	1.02	1.06	1.06	0.75
1½"	0.15	0.42	1.03	1.12	1.07	1.06	0.90
2"	0.15	0.77	1.19	1.16	1.05	1.06	1.05

This data was collected using a limited sample size and are not absolute values. Therefore, reasonable tolerances must be applied. Tests were conducted in accordance with ASTM C423, Mounting A (material applied against a solid backing.)

Technical Information

Tips to Avoid Mold Growth in Ducts

Mold in duct systems occurs when moisture comes into contact with dirt or dust collected on the duct system surfaces. Proper filters will minimize the collection of dust and dirt, but care needs to be exercised to prevent water formation in the duct. A properly sized, installed and operated air conditioning unit will minimize the likelihood of water formation. The system must be maintained and operated to ensure that sufficient dehumidification is occurring and that filters are installed and changed as recommended by the equipment manufacturer.

Disclaimer of Liability

Technical information contained herein is furnished without charge or obligation and is given and accepted at recipient's sole risk. Because conditions of use may vary and are beyond our control, Owens Corning makes no representation about, and is not responsible or liable for the accuracy or reliability of data associated with particular uses of any product described herein.

SCS Global Services provides independent verification of recycled content in building materials and verifies recycled content claims made by manufacturers. For more information, visit www.SCSglobalservices.com. LEED® is a registered trademark of the U.S. Green Building Council.

Standards, Codes Compliance

- ASTM C1071; Type II Rigid Board
- National Fire Protection Association Standards NFPA 90A/90B
- ICC International Mechanical Code
- Meets requirements of ASTM C1338, UL 181, ASTM G21,(fungi test) and ASTM G22 (bacteria test)

Installation

See Owens Corning® "QuietR® Spiral Duct Liner publication Installation Guide" (Pub. No. 61262) for more information on the installation of liner.

Environmental and Sustainability

Owens Corning is a worldwide leader in building material systems, insulation and composite solutions, delivering a broad range of high-quality products and services.

Owens Corning is committed to driving sustainability by delivering solutions, transforming markets and enhancing lives. More information can be found at www.owenscorning.com.

For additional information, refer to the Safe Use Instruction Sheet (SUIS) found in the SDS Database via <http://sds.owenscorning.com>.

Certifications and Sustainable Features

- Certified by SCS Global Services to contain an average 53% with minimum 22% post-consumer and balance 31% pre-consumer recycled glass content
- GREENGUARD Certified products are certified to GREENGUARD standards for low chemical emissions into indoor air during product usage. For more information, visit ul.com/gg*
- Environmental Product Declaration (EPD) has been certified by UL Environment
- Health Product Declaration® for QuietR® Spiral Duct Liner
- Made with electricity from 100% wind power. Environmental Claims Validation by SCS Global Services



*GREENGUARD Gold certification is for boards 1" or less in thickness.

Owens Corning Insulating Systems, LLC

One Owens Corning Parkway
Toledo, Ohio, USA 43659
Ph: 1-800-GET-PINK®

www.owenscorning.com

Pub. No. 10018478-H. Printed in U.S.A. April 2019.

The color PINK is a registered trademark of Owens Corning. © 2019 Owens Corning. All Rights Reserved.